

# Panasonic

2026 / 2027

# RIKON AC

Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā  
ANNO 1991

● siltumsūkņi ● kondicionieri ● rekuperātori ● ventilācija



heating & cooling solutions

# RIKON AC

Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā  
ANNO 1991

● siltumsūkņi ● kondicionieri ● rekuperatori ● ventilācija



Check all our certified heat pumps on:  
[www.heatpumpkeymark.com](http://www.heatpumpkeymark.com)

## Aquarea High Performance

5 kW

7 kW

9 kW

12 kW

16 kW



P. 76 ,  
78

All in One  
· R290  
1ph - 3ph



WH-ADC0509L3E51  
WH-ADC0509L3E5 1)  
WH-ADC0509L3E5B  
WH-ADC0509L3E5AN 1)  
WH-WDG05LE5



WH-ADC0509L3E51  
WH-ADC0509L3E5 1)  
WH-ADC0509L3E5B  
WH-ADC0509L3E5AN 1)  
WH-WDG07LE5



WH-ADC0509L3E51  
WH-ADC0509L3E5 1)  
WH-ADC0509L3E5B  
WH-ADC0509L3E5AN 1)  
WH-WDG09LE5

WH-ADC0316M9E81  
WH-ADC0316M9E82  
WH-ADC0316M9E8AN2  
WH-ADC0316M9E83  
WH-ADC0316M9E8AN3  
**NEW!**  
WH-WDG09ME8



WH-ADC0916M3E51  
WH-ADC0916M3E52 1)  
WH-ADC0916M3E5AN2  
WH-ADC0916M3E53 1)  
WH-ADC0916M3E5AN3  
WH-ADC0316M9E81  
WH-ADC0316M9E82  
WH-ADC0316M9E8AN2  
WH-ADC0316M9E83  
WH-ADC0316M9E8AN3

**NEW!**  
WH-WDG12ME5  
WH-WDG12ME8



WH-ADC0916M3E51  
WH-ADC0916M3E52 1)  
WH-ADC0916M3E5AN2  
WH-ADC0916M3E53 1)  
WH-ADC0916M3E5AN3  
WH-ADC0316M9E81  
WH-ADC0316M9E82  
WH-ADC0316M9E8AN2  
WH-ADC0316M9E83  
WH-ADC0316M9E8AN3

**NEW!**  
WH-WDG16ME5  
WH-WDG16ME8



P. 76 ,  
78

Bi-bloc  
· R290  
1ph - 3ph



WH-SDC0509L3E5 1)  
WH-WDG05LE5



WH-SDC0509L3E5 1)  
WH-WDG07LE5



WH-SDC0509L3E5 1)  
WH-WDG09LE5

WH-SDC0916M3E5 1)  
WH-SDC0316M9E8

**NEW!**  
WH-WDG09ME8



WH-SDC0916M3E5 1)  
WH-SDC0316M9E8

**NEW!**  
WH-WDG12ME5  
WH-WDG12ME8



WH-SDC0916M3E5 1)  
WH-SDC0316M9E8

**NEW!**  
WH-WDG16ME5  
WH-WDG16ME8



P. 78

Control module  
· R290  
1ph - 3ph



WH-CME8  
**NEW!**  
WH-WDG09ME8



WH-CME5  
WH-CME8

**NEW!**  
WH-WDG12ME5  
WH-WDG12ME8



WH-CME5  
WH-CME8

**NEW!**  
WH-WDG16ME5  
WH-WDG16ME8



P. 78

Stand-alone  
· R290 2)  
1ph - 3ph



**NEW!**  
WH-WDG09ME8



**NEW!**  
WH-WDG12ME5  
WH-WDG12ME8



**NEW!**  
WH-WDG16ME5  
WH-WDG16ME8



P. 81

Mono-bloc  
· R32  
1ph



**NEW!**  
WH-MDC05J3E5-1



**NEW!**  
WH-MDC07J3E5-1



**NEW!**  
WH-MDC09J3E5-1

Models with R290 refrigerant. Models with R32 refrigerant.

1) Also available with other backup heater capacities. 2) Requires CZ-RTW2TAW1C.  
WH-\_\_E5 1ph // WH-\_\_E8 3ph.


# Validating efficiency and performance of Aquarea Heat Pumps

# RIKON AC

Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā  
ANNO 1991

● siltumsūkņi ● kondicionieri ● rekuperātori ● ventilācija

Aquarea Heat Pumps achieve outstanding efficiency and performance, validated through ErP labels and Keymark certifications. These credentials ensure that Aquarea Heat Pumps deliver reliable and sustainable heating solutions.

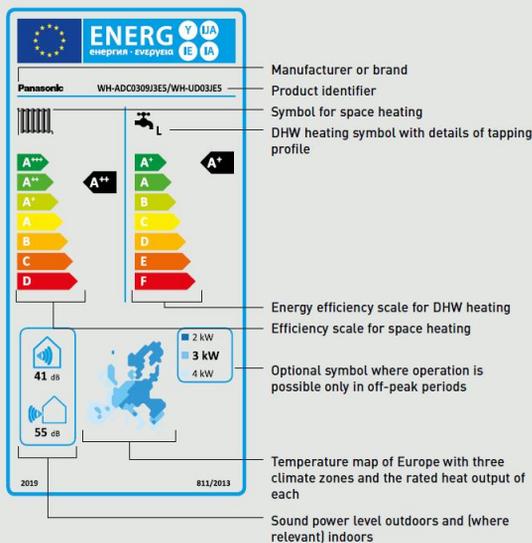

## Energy labels: guiding consumers to energy savings.

Energy labels help consumers make informed purchasing decisions and support Ecodesign requirements that reduce energy demand and combat global warming. Heat pumps are classified into seven efficiency categories, from A+++ (most efficient) to D (least efficient). For hot water cylinders, the range is from A+ to F. Thanks to advanced technologies, Panasonic offers solutions that achieve the highest energy ratings, ensuring high-efficiency and performance.



## Keymark certification: a mark of quality and reliability.

The Keymark certification is a quality mark that demonstrates compliance with European standards. Issued by independent certification bodies, it ensures products meet rigorous quality and performance criteria. Aquarea Heat Pumps proudly carry the Keymark certification, validating their exceptional efficiency and reliability.



Check all our certified heat pumps on: [www.heatpumpkeymark.com](http://www.heatpumpkeymark.com)



## NEW



Check all our certified heat pumps on:  
[www.heatpumpkeymark.com](http://www.heatpumpkeymark.com)



Optional

## NEW! Aquarea High Performance Mono-bloc J Series. Single phase - MDC - R32

**Energy efficiency:** A+++ in heating at 35 °C / "A" water pump with variable speed / Built-in flow meter.

**Flexibility:** Built-in magnetic water filter / Built-in 6 L expansion vessel.

**Comfort:** Operating range to -20 °C / 60 °C flow temperature / Cooling mode down to +10 °C.

**Control:** Additional functions with optional PCB (2 zone control, bivalent control, Smart Grid contact and more).

**Connectivity:** Optional Wi-Fi and BMS integration

## Single phase

Outdoor unit		WH-MDC05J3E5-1	WH-MDC07J3E5-1	WH-MDC09J3E5-1	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	5,00/5,08	7,00/4,76	9,00/4,48	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	5,00/3,01	7,00/2,82	8,95/2,78	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	5,00/3,57	7,00/3,40	7,45/3,13	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	5,00/2,27	6,30/2,16	7,00/2,12	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	5,00/2,78	6,80/2,81	7,50/2,63	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	5,00/1,85	6,30/1,86	7,00/1,80	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	5,00/3,31	7,00/3,06	9,00/2,71	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	5,00/5,05	7,00/4,73	9,00/4,25	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,12/3,63(202/142)	4,90/3,32(193/130)	4,90/3,32(193/130)
	Energy class	A+++ to D	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,00/4,20(237/165)	5,75/4,07(227/160)	5,75/4,07(227/160)
	Energy class	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,08/2,95(160/115)	4,18/2,98(164/116)	4,18/2,98(164/116)
	Energy class	A+++ to D	A++/A+	A++/A+	A++/A+
Sound power <sup>1)</sup>	Heat	dB(A)	59	59	59
Dimension	HxWxD	mm	865x1283x320	865x1283x320	865x1283x320
Net weight		kg	99	104	104
Refrigerant (R32) / CO <sub>2</sub> Eq. <sup>2)</sup>		kg / T	1,3/0,878	1,3/0,878	1,3/0,878
Water pipe connector		Inch	R 1½	R 1½	R 1½
Pump	Number of speeds		Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	34/96	36/100	39/108
Heating water flow (ΔT=5 K. 35 °C)		L/min	14,3	20,1	25,8
Electric backup heater		kW	3,00	3,00	3,00
Input power	Heat	kW	0,985	1,47	2,01
	Cool	kW	1,51	2,29	3,32
Running and starting current	Heat	A	4,7	7,0	9,3
	Cool	A	7,0	10,5	14,7
Current 1		A	12	17	17
Current 2		A	13	13	13
Recommended fuse <sup>3)</sup>		A	30/15	30/15	30/16
Recommended minimum cable size, supply 1 / 2 <sup>3)</sup>		mm <sup>2</sup>	3x1,5/3x1,5	3x2,5/3x1,5	3x2,5/3x1,5
Operating range - outdoor ambient	Heat	°C	-20 - 35	-20 - 35	-20 - 35
	Cool	°C	+10 - +43	+10 - +43	+10 - +43
Water outlet	Heat	°C	20 - 60	20 - 60	20 - 60
	Cool	°C	5 - 20	5 - 20	5 - 20

1) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. 2) WH-MDC models are hermetically sealed. 3) Check local regulations. \*EER and COP calculation is based in accordance to EN 14511.

## Accessories

PAW-TD20C1E5-1	Tank 200 L - Stainless steel
PAW-TD30C1E5-1	Tank 300 L - Stainless steel
PAW-TA20C1E5STD	Tank 200 L - Enamelled
PAW-TA30C1E5STD	Tank 300 L - Enamelled
PAW-TD20B8E3-2	Combo Tank 185 L + 80 L - Enamelled
PAW-TD23B6E5	Combo Tank 230 L + 60 L - Stainless steel
PAW-3WYVLY-HW	3 way valve for DHW tanks
PAW-BTANK50L-2	Buffer tank 50 L

## Accessories

CZ-TAW1B	Optional Wi-Fi or WLAN adapter for smart control via Comfort Cloud App and/or remote maintenance via Aquarea Service Cloud
CZ-TAW1-CBL	10 m extension cable for CZ-TAW1B
PAW-A2W-AFVLV-1	1 antifreeze valve 1". It is required to order 2 valves per system
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIRELESS	Wireless LCD room thermostat

# RIKON AC

Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā  
ANNO 1991

● siltumsūkņi ● kondicionieri ● rekuperātori ● ventilācija



# Storage tanks for heating and DHW

NEW

## Buffer tanks



Model		PAW-BTANK50L-2	PAW-BTANK100L	PAW-BTANKG200L	PAW-BTANKG260L	PAW-BC50FAE	PAW-BC80FAE	PAW-BC100FAE
Water volume	L	48	100	194	252	500	800	1000
Energy losses	W							
Energy efficiency class (from A+ to F)		<b>B</b>	<b>B</b>	<b>B</b>	<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>
Material		Stainless steel	Stainless steel	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Electric heater	kW	—	—	—	—	Optional PAW-HT9F24AE8	Optional PAW-HT9F24AE8	Optional PAW-HT9F24AE8
Jacket		Included	Included	Included	Included	Included	PAW-JKBC80FAE	PAW-JKBC100FAE
Dimension (Height / Diameter)	mm	636 / 430	1175 / 430	983 / 620	1239 / 620	1725 / 650	1785 / 790	2135 / 790
Net weight	kg	13	22	41	46	85	107	132

\*Automatic air vent and drain cock are included. Built-in pocket sensor (sensor not included). \*\*50 and 100 L Buffer Tanks are produced by OSO. 200 and 260 L Buffer Tanks are produced by Lapesa. 500, 800 and 1000 L Buffer Tanks are produced by Austria Email.

**Accessories**

**PAW-HT9F24AE8** Adjustable 3 phase electric heater D240 mm. Selectable output: 9,00 / 7,50 / 6,00 kW. Compatible with PAW-TE75H1AEAN, PAW-TE90H1AEAN, PAW-BC50FAE, PAW-BC80FAE and PAW-BC100FAE


**Accessories**

**PAW-JKBC80FAE** Jacket for 800 L buffer tank (PAW-BC80FAE)

**PAW-JKBC100FAE** Jacket for 1000 L buffer tank (PAW-BC100FAE)

## Combo tanks

The best option to combine with Mono-bloc units. DHW tank with buffer tank. Designed for retrofit applications, the DHW tank with a buffer tank is particularly suitable for fast integration on an existing installation. Easy to install, nice looking, high-efficiency for DHW production and for heating.

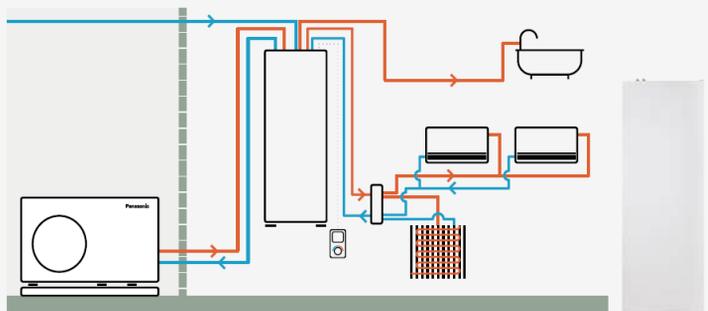

Model		PAW-TD20B8E3-2		PAW-TD23B6E5	
Material		Enamelled		Stainless steel	
Dimension HxWxD	mm	1770x640x690		1750x600x646	
Weight (empty)	kg	150		111	
Water volume	L	185 + 80		230 + 60	
Power supply	V, Phase, Hz	230, 1, 50		230, 1, 50	
		Hot water tank	Buffer tank	Hot water tank	Buffer tank
Water volume	L	185	80	230	60
Energy efficiency class (from A+ to F) <sup>1)</sup>		<b>B</b>	<b>B</b>	<b>B</b>	<b>A</b>
Max working pressure	MPa (bar)	0,8 (8)	0,6 (6)	1,0 (10)	0,3 (3,0)
Pressure test	MPa (bar)	1,2 (12)	0,9 (9)	1,5 (15)	0,39 (3,9)
Max working temp	°C	90	90	80	80
Connections	mm	Ø22	Ø22	Ø22	Ø22, copper
Material		S 275 JR vitrified	S235 JR	EN 14521	EN 14521
Insulation	Material, t=mm	PUR, 50	PUR 40	PUR, 50	PUR, 50
Heating coil surface	m <sup>2</sup>	2,1	—	1,8	—
Electric heater	W	3000	—	2800	—
Energy loss at 65 °C <sup>2)</sup>	kWh/24h	1,3	—	1,25	—
Standing loss	W	53	46	52	29

1) EU Regulation 812/2013. 2) Tested pursuant to EN 12897:2006. \*Enamelled Combo tank is produced by Lapesa. Stainless steel Combo tank is produced by OSO.

# RIKON AC

Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā ANNO 1991

● siltumsūkņi ● kondicionieri ● rekuperatori ● ventilācija

NEW



DHW tanks certified with selected outdoor units. See certifications at: [www.heatpumpkeymark.com](http://www.heatpumpkeymark.com)



### Enamelled DHW tanks

- Optional 3 way valve accessory
- 20 m temperature sensor cable included
- 2 Years warranty of the inner vessel

Model	PAW-	TA15C1E5	TA20C1E5STD	TA30C1E5STD	TA30C2E5STD	TA40C1E5STD	TE50H1AE	TE75H1AEAN	TE90H1AEAN
Water volume	L	167	200	290	350	380	500	750	900
Maximum water temperature	°C	90	95	95	95	95	95	95	95
Dimension (Height / Diameter)	mm	1297 / 560	1340 / 610	1800 / 610	1835 / 670	1835 / 670	1806 / 760	2000 / 1000 <sup>1)</sup>	2350 / 1000 <sup>1)</sup>
Weight / filled with water	kg	88 / 255	90 / 280	120 / 389	169 / 519	191 / 572	254 / 754	317 / 1067	374 / 1274
Electric heater	kW	—	3,00	3,00	3,00	3,00	Optional PAW-HT6F18AE8	Optional PAW-HT6F18AE8	Optional PAW-HT6F18AE8
Jacket		Included	Included	Included	Included	Included	Included	PAW-JKTE75H1AE	PAW-JKTE90H1AE
Power supply	V	—	230	230	230	230	—	—	—
Material		Enamelled	Enamelled	Enamelled	Enamelled	Enamelled	Enamelled	Enamelled	Enamelled
Vessel protection (anode type)		Magnesium	Magnesium	Magnesium	Magnesium	Magnesium	Magnesium	Electronic	Electronic
Number of coils		1	1	1	2 (solar + heat pump)	1	1	1	1
Exchange surface	m <sup>2</sup>	1,8	1,8	2,6	3,5 / 1,2	3,8	6	6	7,5
Energy loss at 65 °C <sup>2)</sup>	kWh/24h	1,08	1,37	1,61	1,76	1,76	1,90	2,56	2,87
Energy losses	W	45	57	67	73	73	79	107	120
<b>Energy efficiency class (from A+ to F)</b>		<b>B</b>	<b>B</b>	<b>B</b>	<b>B</b>	<b>B</b>	<b>B</b>	<b>C</b>	<b>C</b>

1) Including Jacket. 2) Insulated tested under EN12897. \*Refer to the service manual for further details. \*\*PAW-TA15C1E5 is produced by Lapesa. All other Enamelled tanks are produced by AEmail.

#### Accessories

##### PAW-HT6F18AE8

Adjustable 3 phase electric heater D180 mm. Selectable output: 6,00 / 4,00 / 3,00 kW. Compatible with PAW-TE50H1AE

##### PAW-HT9F24AE8

Adjustable 3 phase electric heater D240 mm. Selectable output: 9,00 / 7,50 / 6,00 kW. Compatible with PAW-TE75H1AEAN, PAW-TE90H1AEAN, PAW-BC50FAE, PAW-BC80FAE and PAW-BC100FAE

#### Accessories

##### PAW-JKTE75H1AE

Jacket for 750 L DHW tank (PAW-TE75H1AEAN)

##### PAW-JKTE90H1AE

Jacket for 900 L DHW tank (PAW-TE90H1AEAN)

### Stainless steel DHW tanks

- Optional 3 way valve accessory
- 20 m temperature sensor cable included
- 2 Years warranty
- No maintenance required



Model		PAW-TD20C1E5-1	PAW-TD30C1E5-1	PAW-TD30C1E5HI-1
Water volume	L	192	284	280
Maximum water temperature	°C	75	75	75
Energy losses	W	42	49	49
<b>Energy efficiency class (from A+ to F)</b>		<b>A</b>	<b>A</b>	<b>A</b>
Material		Stainless steel	Stainless steel	Stainless steel
Electric heater	kW	1,5	1,5	1,5
Dimension (Height / Diameter)	mm	1270 / 595	1750 / 595	1750 / 595
Weight / filled with water	kg	50 / —	61 / —	65 / —
Power supply	V	230	230	230
Exchange surface	m <sup>2</sup>	1,8	1,8	2,35
Energy loss at 65 °C <sup>1)</sup>	kWh/24h	1,01	1,18	1,18

1) Insulated tested under EN12897. \*Stainless steel tanks are produced by OSO.

#### Accessories for sanitary tanks

##### PAW-3WYVLV-HW

3 way valve for DHW tanks

##### CZ-NV1

3 way valve kit to fit inside the hydrokit. H and J Series

##### CZ-NV2

3 way valve kit to fit inside the hydrokit. K and L Series

#### Accessories for sanitary tanks

##### CZ-NV3

3 way valve kit to fit inside the hydrokit. M Series

##### PAW-EANODE2

Impressed current anode for 200 L Stainless steel tanks

##### PAW-EANODE3

Impressed current anode for 300 L Stainless steel tanks

# RIKON AC

Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā ANNO 1993

• siltumsūkņi • kondicionieri • rekuperatori • ventilācijas

# Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

# RIKON AC

Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā  
ANNO 1991

● siltumsūkņi ● kondicionieri ● rekuperatori ● ventilācija

## Aquarea High Performance Mono-bloc J Series. Single phase - MDC · R32

### WH-MDC05J3E5-1

Tamb	HC	IP	COP												
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	4,37	1,73	2,53	4,16	2,03	2,05	3,84	2,37	1,62	3,43	2,64	1,30	—	—	—
-15	5,13	1,78	2,88	5,00	2,17	2,30	4,75	2,51	1,89	3,70	2,45	1,51	—	—	—
-7	5,17	1,49	3,47	5,00	1,80	2,78	4,80	2,16	2,22	5,00	2,70	1,85	4,68	2,71	1,73
2	5,00	1,11	4,50	5,00	1,40	3,57	5,00	1,81	2,76	5,00	2,20	2,27	4,80	2,40	2,00
7	5,09	0,78	6,53	5,00	0,99	5,05	5,00	1,31	3,82	5,00	1,66	3,01	4,58	1,90	2,41
25	4,96	0,77	6,44	5,04	0,90	5,60	5,31	1,16	4,58	5,61	1,34	4,19	5,15	1,33	3,87

### WH-MDC07J3E5-1

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	4,86	2,03	2,39	4,66	2,35	1,98	4,44	2,75	1,61	4,23	3,13	1,35	—	—	—
-15	5,80	2,11	2,75	5,60	2,40	2,33	5,30	2,84	1,87	5,00	3,32	1,51	—	—	—
-7	6,76	2,07	3,27	6,80	2,42	2,81	6,30	2,82	2,23	6,30	3,39	1,86	4,74	2,76	1,72
2	6,83	1,66	4,11	7,00	2,06	3,40	6,85	2,50	2,74	6,30	2,92	2,16	4,80	2,40	2,00
7	7,32	1,19	6,15	7,00	1,47	4,76	7,00	1,96	3,57	7,00	2,48	2,82	6,18	2,44	2,53
25	6,80	0,64	10,63	6,67	0,93	7,17	6,79	1,38	4,92	6,70	1,80	3,72	6,22	1,78	3,49

### WH-MDC09J3E5-1

Tamb	HC	IP	COP												
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	5,33	2,36	2,26	6,43	3,60	1,79	5,78	3,83	1,51	4,83	3,64	1,33	—	—	—
-15	7,76	3,20	2,43	7,60	3,41	2,23	7,00	3,71	1,89	5,60	3,80	1,47	—	—	—
-7	7,39	2,45	3,02	7,50	2,85	2,63	7,30	3,37	2,17	7,00	3,89	1,80	6,44	3,67	1,75
2	7,38	1,89	3,90	7,45	2,38	3,13	7,00	2,85	2,46	7,00	3,30	2,12	5,46	2,72	2,01
7	9,15	1,59	5,75	9,00	2,01	4,48	9,00	2,61	3,45	8,95	3,22	2,78	7,25	2,87	2,53
25	8,02	0,98	8,18	7,88	1,32	5,97	8,46	1,86	4,55	7,60	2,03	3,74	6,30	1,87	3,37

## Aquarea High Performance Mono-bloc J Series. Single phase - MDC · R32

### WH-MDC05J3E5-1

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	5,18	0,82	6,32	6,17	0,84	7,35	5,78	0,60	9,63
25	5,38	1,22	4,41	6,64	1,25	5,31	5,55	0,78	7,12
35	5,00	1,54	3,25	5,86	1,61	3,64	5,00	0,99	5,05
43	4,19	1,85	2,26	5,36	1,92	2,79	4,37	1,30	3,36

### WH-MDC07J3E5-1

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	5,38	0,83	6,48	6,69	0,85	7,87	7,65	0,76	10,07
25	6,96	1,82	3,82	9,06	1,98	4,58	7,58	1,23	6,16
35	7,00	2,29	3,06	8,37	2,47	3,39	7,00	1,48	4,73
43	5,60	2,55	2,20	6,87	2,58	2,66	6,10	1,88	3,24

### WH-MDC09J3E5-1

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	6,89	1,21	5,69	8,65	1,23	7,03	9,82	1,19	8,25
25	9,50	2,84	3,35	11,55	3,06	3,77	9,68	1,82	5,32
35	9,00	3,32	2,71	10,10	3,51	2,88	9,00	2,12	4,25
43	5,42	2,56	2,12	6,56	2,56	2,56	7,40	2,56	2,89

Tamb: Ambient Temperature [°C]. LWC: Leaving Water Condenser Temperature [°C]. HC: Heating Capacity [kW]. CC: Cooling Capacity [kW]. IP: Input Power [kW].  
This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.


## Examples of installations

# RIKON AC


Panasonic oficiālais izplatītājs un sertificēts servisa centrs Latvijā  
ANNO 1991

● siltumsūkņi ● kondicionieri ● rekuperatori ● ventilācija


### Aquarea Split Bi-bloc: Bivalent with buffer tank and mixing valve

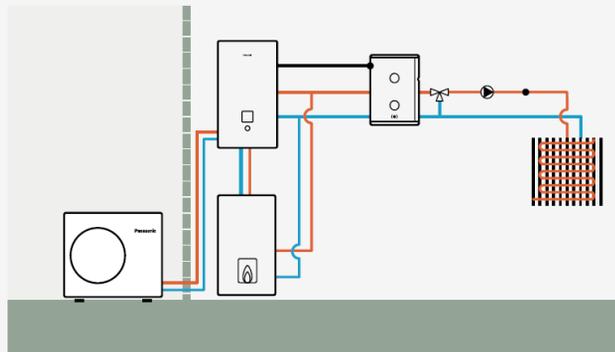


### Aquarea Split Bi-bloc: Buffer tank with solar and mixing valve

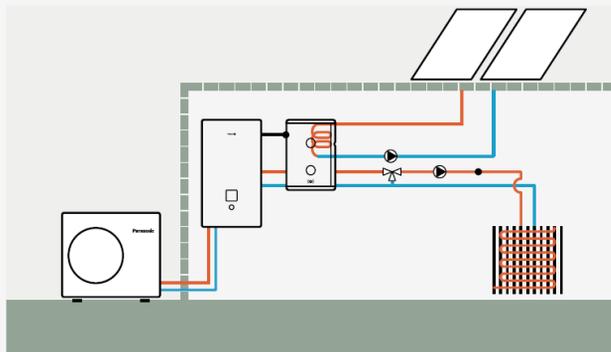


### Aquarea Hydraulic Mono-bloc: 2 zones with external kit without buffer tank

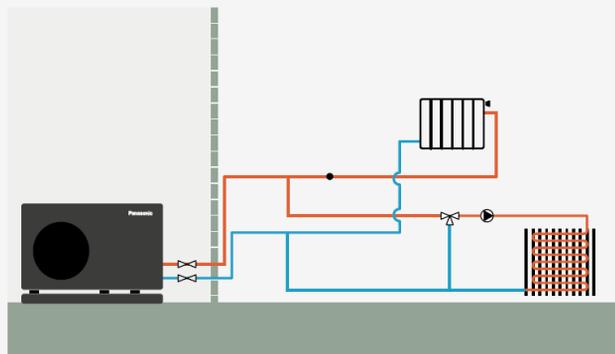


### Aquarea Hydraulic Bi-bloc: 2 zones with external kit, buffer tank and swimming pool

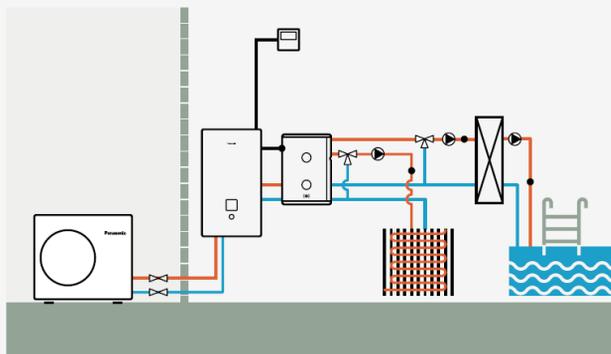

### Aquarea Hydraulic All in One: 2 zones with external kit, without buffer tank

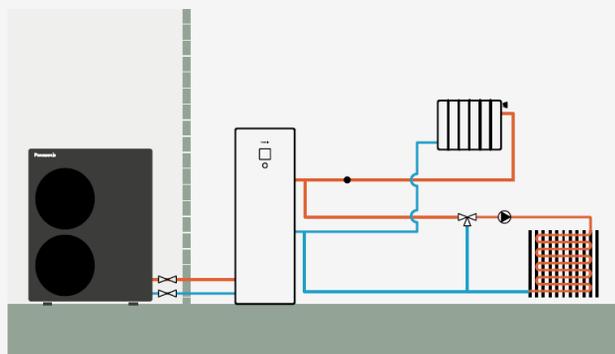


### Aquarea Hydraulic All in One 2 zones: 2 zones built-in, without buffer tank

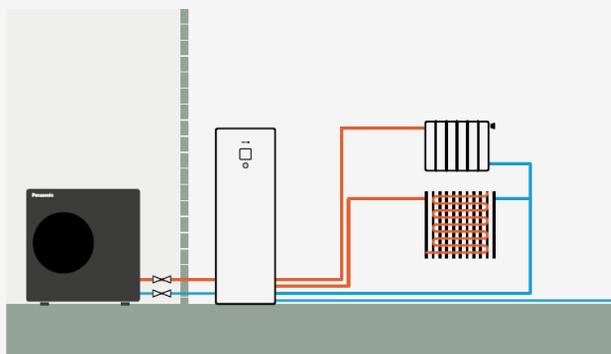





## Hydraulic scheme generator.

The Aquarea Hydraulic Scheme Generator (HSG) allows users to select a hydraulic schematic according to their installation requirements. This will be accompanied by the relevant electrical connection schematic and component list.

Available on PRO Club [www.panasonicproclub.com](http://www.panasonicproclub.com).

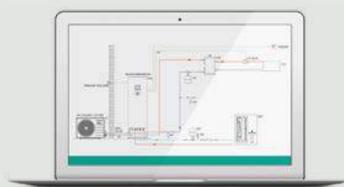

Aquarea High Performance Mono-bloc J Series outdoor units from 5 to 9 kW.

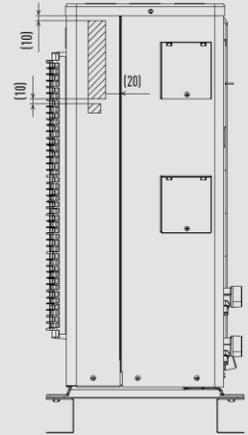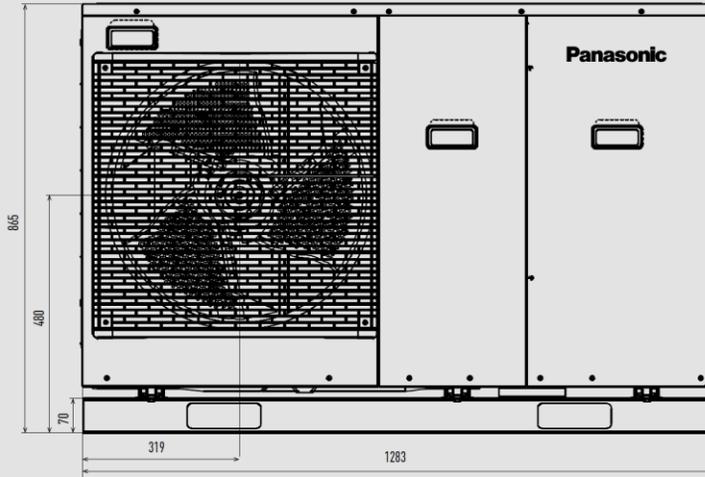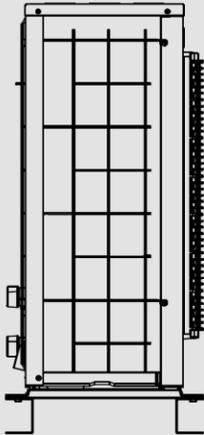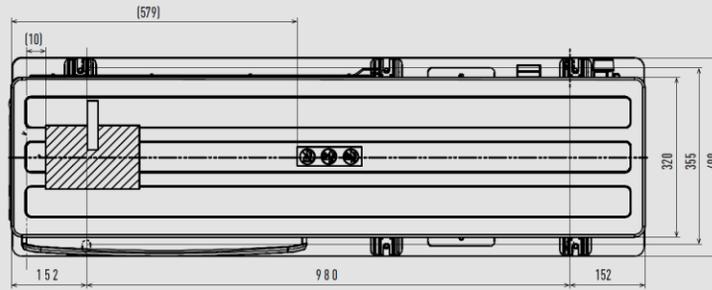

Unit: mm